


1/8" NU-CHECK® and 1/8" CLEAN-CHECK® COMPARISON


The 1/8" ported Nu-Check® valve models have been phased out. However, for almost all pneumatic applications a 1/8" Nu-Check® valve can be replaced by an equivalent 1/8" Clean-Check®.

The general comparison data for the 1/8" ported Nu-Check® and Clean-Check® valves is:

1/8" Nu-Check®

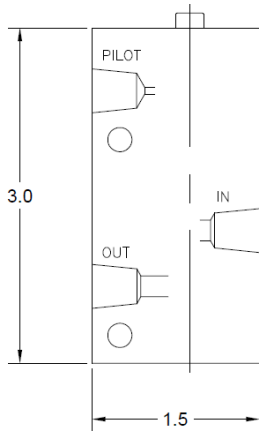

1/8" Clean-Check®

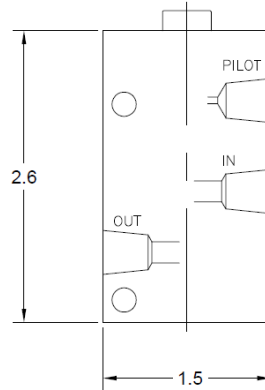

	Nu-Check®	Clean-Check®
Flow Rate (Cv)	0.4	0.8
Average Checked to Pilot Pressure Ratio	4:1	3:1
Typical Piloted Response Rate		
Override Engage	5-10 msec	5-10 msec
Override Release	10-45 msec	10-35 msec
Air over Oil Application Suitable	Yes	No

OPTIONS

Viton Seals	Yes	Yes
BSPP Porting	Yes	Yes
Stainless Steel (SS)	No	Yes
No Cracking pressure (NCP)	Yes	Yes
High Pressure (HP)	Yes	No
Vacuum (VAC)	Yes	No

MODEL EQUIVALENCE

Nu-Check® Model	Clean-Check® Equivalent
301201	501201
301202	501202
301201BSPP	501201BSPP
301201SS	501201SS
301201HP	---
301201VAC	---
301201NCP	501201NCP
311201	511201
311202	511202
311201BSPP	511201BSPP
311201SS	511201SS
311201HP	---
311201VAC	---
311201NCP	511201NCP
321201	521201
321202	521202
321201BSPP	521201BSPP
321201SS	521201SS
321201HP	---
321201VAC	---
321201NCP	521201NCP

*The 1/8" ported Nu-Check® valve models have been phased out as of March 29, 2006.